


## XO 2150 FRAME

RECOMMENDED EXCAVATOR SIZE 8 TONS


	METRIC	IMPERIAL
BUCKET VOLUME	0.55 m <sup>3</sup>	0.72 yd <sup>3</sup>
WIDTH	1850 mm	73 inch
DEPTH	970 mm	38 inch
HEIGHT	880 mm	35 inch
WEIGHT	345 kg	760 lbs

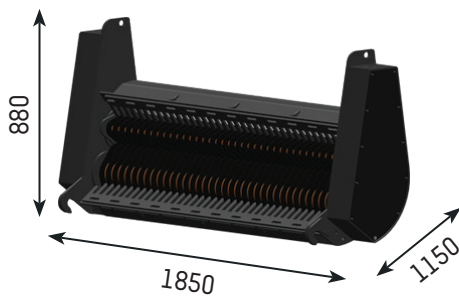

## + SB / SC MODULE

	METRIC	IMPERIAL
MAXIMUM ALLOWED PRESSURE	300 bar	4350 psi
RECOMMENDED HYDRAULIC OIL FLOW, MIN-MAX	40 - 75 l/min	10 - 20 gal/min
BUCKET VOLUME	0.52 - 0.60 m <sup>3</sup>	0.60 - 0.75 yd <sup>3</sup>
SCREENING AREA	0.8 m <sup>2</sup>	8.6 ft <sup>2</sup>
WIDTH	1850 mm	73 inch
DEPTH	1150 mm	45 inch
HEIGHT	880 mm	35 inch
WEIGHT	840 kg	1850 lbs


\* WEIGHT IS CALCULATED WITH CONFIGURATION X001 10/30, COMB COUNTER BLADES, NO CLEANING SCRAPERS

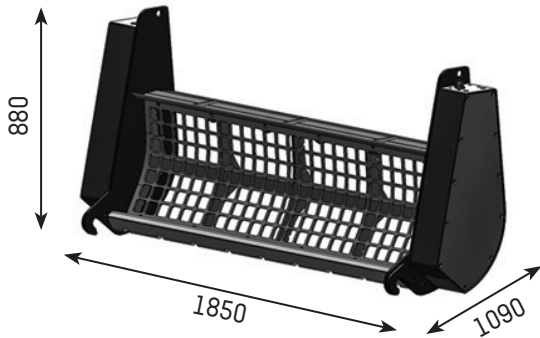

### + SV MODULE

	METRIC	IMPERIAL
MAXIMUM ALLOWED PRESSURE	200 bar	2900 psi
RECOMMENDED HYDRAULIC OIL FLOW, MIN-MAX	20 - 40 l/min	5 - 10 gal/min
BUCKET VOLUME	0.52 - 0.60 m <sup>3</sup>	0.60 - 0.75 yd <sup>3</sup>
SCREENING AREA	0.7 m <sup>2</sup>	7.5 ft <sup>2</sup>
WIDTH	1850 mm	73 inch
DEPTH	1090 mm	43 inch
HEIGHT	880 mm	35 inch
WEIGHT*	540 kg	1190 lbs

\* WEIGHT WITH 25 MM SCREENING MESH

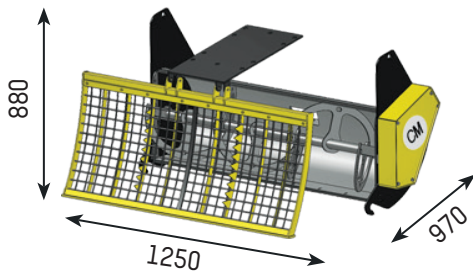

### + CM MODULE

	METRIC	IMPERIAL
MAXIMUM ALLOWED PRESSURE	210 bar	3000 psi
RECOMMENDED HYDRAULIC OIL FLOW, MIN-MAX	40 - 95 l/min	10 - 25 gal/min
BUCKET VOLUME	0.52 - 0.60 m <sup>3</sup>	0.60 - 0.75 yd <sup>3</sup>
SCREENING AREA	N/A	N/A
WIDTH	1850 mm	73 inch
DEPTH	1250 mm	49 inch
HEIGHT	880 mm	35 inch
WEIGHT*	635 kg	1400 lbs

\* WEIGHT WITH TOP GRILL